



Terralys LF 15

Intended use

Functions

<input checked="" type="checkbox"/>		EN 13249 Construction of roads and other trafficked areas
<input checked="" type="checkbox"/>		EN 13250 Construction of railways
<input checked="" type="checkbox"/>		EN 13251 Earthworks, foundations and retaining structures
<input checked="" type="checkbox"/>		EN 13252 Drainage systems
<input checked="" type="checkbox"/>		EN 13253 Erosion control works
<input checked="" type="checkbox"/>		EN 13254 Construction of reservoirs and dams
<input checked="" type="checkbox"/>		EN 13255 Construction of canals
<input type="checkbox"/>		EN 13256 Construction of tunnels and underground structures
<input checked="" type="checkbox"/>		EN 13257 Solid waste disposal
<input checked="" type="checkbox"/>		EN 13265 Liquid waste disposal

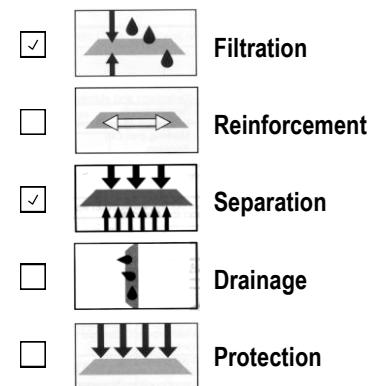

Durability

- To be covered within 1 month after installation.
- Predicted to be durable for a minimum of 25 years in natural soils with pH between 4 and 9 and soil temperatures lower than 25 °C.
- Terralys geotextiles consisting solely of polypropylene material have passed the oxidation test according to the EN ISO 13438. The minimum percentage retained strength is > 50 %.

Properties	Standard	Average	Tolerance	Unit
Tensile Strength (MD)	EN ISO 10319	16,0	- 2,0	kN/m
Tensile Strength (CMD)	EN ISO 10319	16,0	- 2,0	kN/m
Elongation (MD)	EN ISO 10319	22,0	± 5,0	%
Elongation (CMD)	EN ISO 10319	20,0	± 4,6	%
Dynamic Perforation Resistance	EN ISO 13433	17	+ 4,3	mm
Resistance to Static Puncture	EN ISO 12236	2,00	- 0,2	kN
Characteristic Opening Size	EN ISO 12956	200	± 60	µm
Water Permeability Normal to the Plane	EN ISO 11058	15	- 4	10 ⁻³ m/s
Mass per unit area *	EN ISO 9864	95,0	± 9,5	g/m ²
Fabric width *		on request	± 5	cm
Fabric length*		on request	± 2	%

* not mandated characteristics for CE-marking